

**SOUND ABSORPTION COEFFICIENT  $\alpha_s$   
OF SUSPENDED CEILING PANELS**

Test **11**  
Date **16/05/14**  
Station **ALPHA**  
AA45

**REQUESTER, MANUFACTURER** SAINT GOBAIN ECOPHON  
**NAME** Focus Dg 20 mm  
**FITNESS FOR PURPOSE** Unchecked  
**STANDARDS** EN ISO 354, EN ISO 11654, prEN 16487  
**CONFIGURATION** 200 mm overall depth of construction


**MAIN CHARACTERISTICS**

Dimensions in mm : 2960 x 3550  
Area in m<sup>2</sup> : 10.5  
Thickness in mm : 20  
Mass per unit area in kg/m<sup>2</sup>: 2.3  
Mounting type : E-200

**MEASUREMENT CONDITIONS**

**Empty room:** Temperature: 18.0°C  
Relative humidity: 60%  
**Room with sample:** Temperature: 19.0°C  
Relative humidity: 54%

**RESULTS**

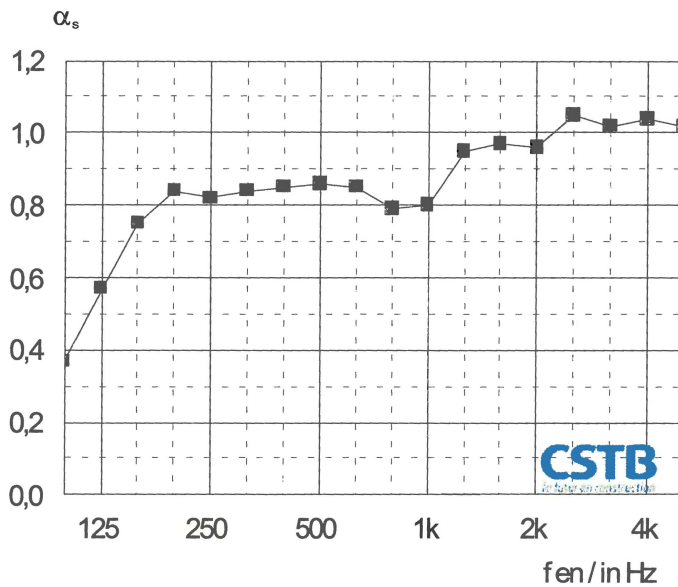

f	$\alpha_s$
100	0,37
125	0,57
160	0,75
200	0,84
250	0,82
315	0,84
400	0,85
500	0,86
630	0,85
800	0,79
1000	0,80
1250	0,95
1600	0,97
2000	0,96
2500	1,05
3150	1,02
4000	1,04
5000	1,02
Hz	

$\alpha_w = 0,90$   
classement / class: A

*It is strongly recommended to use this single number rating in combination with the complete sound absorption coefficient curve.*