

**SOUND ABSORPTION COEFFICIENT α_p
OF Baffles**

Test **13**
Date **27/06/17**
Station **ALPHA**

AA79

REQUESTER, MANUFACTURER SAINT-GOBAIN ECOPHON

NAME Solo Baffle 1200 x 300 x 40

FITNESS FOR PURPOSE Unchecked

CONFIGURATION 300 mm overall depth of construction, oriented in rows cc
400 mm

STANDARDS EN ISO 354, EN ISO 11654 and EN 16487

MAIN CHARACTERISTICS


Total test area in m² : 11.46
Thickness of a baffle in mm : 40
Mounting type : J

MEASUREMENT CONDITIONS

Empty room: Temperature: 23.5 °C
Room with sample: Temperature: 24.0 °C
Relative humidity: 70 % Relative humidity: 69 %

RESULTS

α_p

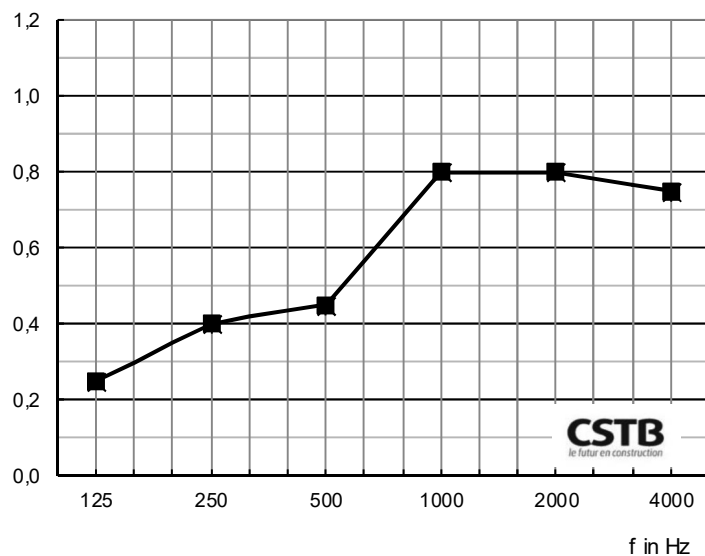

f	α_p
125	0,25
250	0,40
500	0,45
1000	0,80
2000	0,80
4000	0,75
Hz	

$\alpha_w = 0,55$ (MH) *

Classement : D

NRC = 0,60

SAA = 0,61

* It is strongly recommended to use this single number rating in combination with the complete sound absorption coefficient curve.